Ceiling LED Pendant

PD39317-UNV-010-RT

INSTALLATION SHEET

START FROM HERE

• Make sure **POWER** is **COMPLETELY OFF** at the fuse box
• Have your fixture installed by a qualified licensed electrician
• Prepare everything in a clear area
• Wear gloves at all time during this installation
• Read instructions carefully before you start assembly
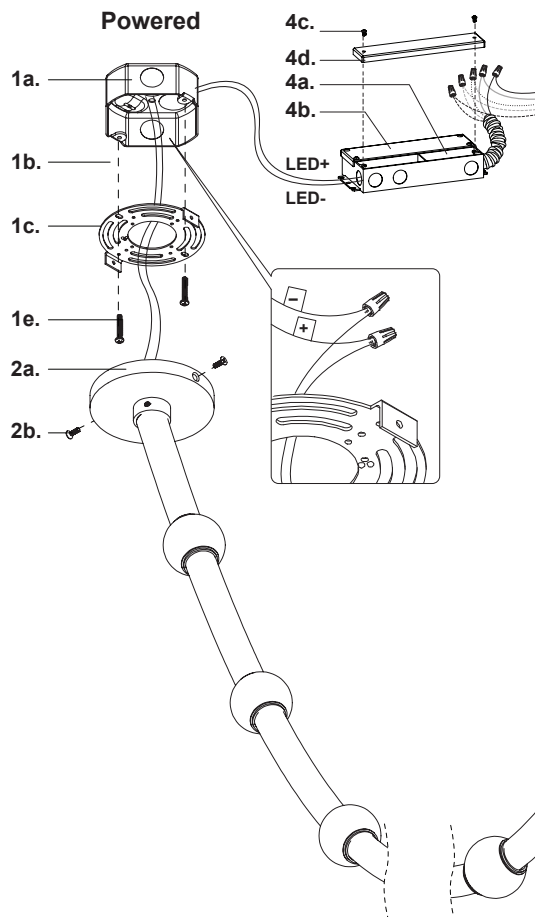• Keep this installation sheet for future reference
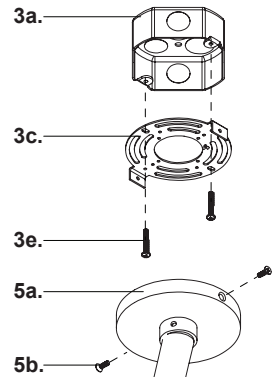
Technical Support: 1-855-855-8926

Please Note:
• This Kuzco LED fixture comes with pre-wired LED module(s)
• Unless instructed, Do Not touch any part of the LED module(s) as any unnecessary contact with the module could cause permanent damage
• Use ELV (Electronic Low Voltage) or TRIAC or 0-10V type of dimmer for dimming application
• 120-277V input

1. Remove fixture from its original package

2. Remote driver **(4a)** must be installed and voltage wires brought to the mounting location prior to fixture installation. Make proper electrical connections (**black** to **hot** "L", **white** to **neutral** "N", **green** to **"GND"**, **Dim +** to **purple**, **Dim-** to **gray**) with wire nuts provided in hardware package. Secure driver lid **(4d)** to driver box **(4b)** with screws **(4c)**

3. Connect LED+/LED- wire from remote driver **(4a)** to approximate location. Make proper LED+/LED- wire connection with wire nuts provided

4. Attach mounting plate **(1c)** to electrical junction box **(1a)** using junction box screws provided **(1e)** in hardware package. Secure non-power mounting plate **(3c)** to non-power junction box **(3a)** with screws **(3e)**

5. Attach canopy **(2a)** to mounting plate **(1c)** with canopy screws **(2b).** Secure non-power canopy **(5a)** to non-power mounting plate **(3c)** with screws **(5b)**

Non-Powered

Wires	
Hot (Black)	————
Neutral (White)	————
Ground (Green)	··········
Dim - (Gray): Optional	– – – –
Dim + (Purple): Optional	- - - - -

Powered